


“MJM” SERIES STAINLESS STEEL JET PUMP

Application

Can be used to transfer clean water or other liquids similar to water in physical and chemical properties
 Suitable for lifting water from the well, sprinkling irrigation in garden, pressure boosting of running water, and supporting equipment etc.

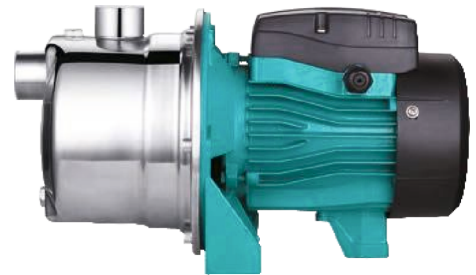

PUMP

- Stainless steel pump body
- Support under special anti-rust treatment
- Stainless steel impeller
- AISI 304 shaft
- Max. liquid temperature: +40°C
- Max. suction: +9 m

MOTOR

- C&U bearing
- Motor with copper winding
- Built-in thermal protector for single phase motor
- Insulation class: F
- Protection class: IPX4
- Max. ambient temperature: +40°C



TECHNICAL DATA

MODEL	POWER		Q (m ³ /h)	0	0.6	0.6	0.9	1.2	1.5	1.8	2.1	2.4	2.8	3.0	3.3	3.6
	kW	HP	Q (l/min)	0	5	10	15	20	25	30	35	40	47	50	55	60
MJM45S	0.45	0.6	H (m)	38	35	31	27	25	22	20	19	16	-	-	-	-
MJM75S	0.75	1.0		46	40	38	36	34	32	30	28	27	25	23	20	-